

MAXSYS®

INTEGRATED SYSTEMS TECHNOLOGY

REMOTE ANNUNCIATORS

Maxsys remote annunciators are designed to make it easy and economical to add point only or point/graphic display of system status and operation to any Maxsys burglar or fire alarm system.

Displaying zone openings and closings, trouble conditions, device operation, and system status... all at a glance... Maxsys annunciators make the system easier to operate and understand for both users *and* emergency response personnel!


System Capacity

- up to 144 points per system
- any number of annunciators & any mix of models in a system
- install annunciators anywhere on Combus up to 1,000' (305m) from main control panel

PC4612 Fire Zone Annunciator



- surface mount LCD style plastic panel for fire zone annunciation includes :
 - ten... fire alarm zones... red indicators
 - two... fire supervisory zones... yellow indicators
 - one... common bell zone trouble... yellow indicator
 - one... common fire zone trouble... yellow indicator
 - one... common system trouble... yellow indicator
 - one... AC 'ON'... green indicator
 - one... set zone ID peel & stick labels
- current draw... 15mA plus 20mA per active LED (from Combus)

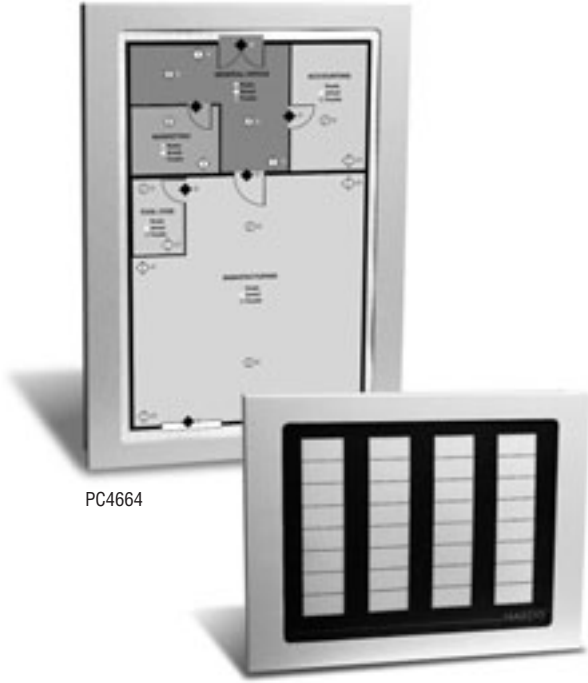

PC4664

PC4632

Point/Graphic Annunciators

- provides point/graphical display of system conditions :
 - zone alarms
 - partition status (armed, ready, trouble)
 - common fire zone trouble
 - common bell trouble
 - common battery trouble
 - common system trouble
- uses PC4216 modules to power plug-in LED indicator lights
- customize display using using transparency overlays and plug-in LED's
- continuous hinged, screw closure front panel
- surface or flush mounted with optional trim
- current draw... 15mA per PC4216 plus 20mA per active LED (from Combus)

PC4632 – 32 Point Capacity

- 8.5" x 11" (21.6 x 27.9cm) display area complete with :
 - one... PC4216, 16 point low-power output module
 - one... PC4600LG pkg. of 4 LED grids to cover entire display area
 - one... PC4600LA-M pkg. of 1 green, 10 red, and 5 yellow LED assemblies
 - one... PC4632GP point/graphic display package which includes a preprinted point display overlay for 32 indicators and space for labels
- capacity for two PC4216 modules for 32 indicators

PC4664 – 64 Point Capacity


- 11" x 17" (27.9 x 43.2cm) display area complete with :
 - two... PC4216, 16 point low-power output modules
 - two... PC4600LG pkgs. of 4 LED grids to cover entire display area
 - one... PC4600LA-M pkg. of 1 green, 10 red, and 5 yellow LED assemblies
 - one... PC4600LA-R pkg. of 16 red LED assemblies
 - one... PC4664GP point/graphic display packages which includes a preprinted point display overlay for 64 indicators and space for labels
- capacity for four PC4216 modules for 64 indicators

Ordering Information

- PC4612** **12 zone fire annunciator**
5.75" x 4.5" x 1" deep (14.4 x 11.4 x 2.5cm)
- PC4632** **32 zone point/graphic annunciator c/w :**
- one... PC4032C beige cabinet, 10.3"H x 13.3"W x 2.6"D (26.2 x 33.8 x 6.6cm)
 - one... PC4216, 16 point low-power output module
 - one... PC4600LG pkg. of 4 LED grids to cover entire display area
 - one... PC4600LA-M pkg. of 1 green, 10 red, and 5 yellow LED assemblies
 - one... PC4632GP point/graphic display package
 - space for *two* PC4216 modules
- PC4632FT** **flush trim for PC4632**
- PC4664** **64 zone point/graphic annunciator c/w :**
- one... PC4064C beige cabinet, 18.7"H x 13.3"W x 2.6"D (47.5 x 33.8 x 6.6cm)
 - two... PC4216, 16 point low-power output modules
 - two... PC4600LG pkgs. of 4 LED grids to cover entire display area
 - one... PC4600LA-M pkgs. of 1 green, 10 red, and 5 yellow LED assemblies
 - one... PC4600LA-R pkg. of 16 red LED assemblies
 - one... PC4664GP point/graphic display packages
 - space for *four* PC4216 modules

- PC4664FT** **flush trim for PC4664**
- PC4600LA-R** .. **pkg. of 16 red LED assemblies**
- PC4600LA-G** .. **pkg. of 16 green LED assemblies**
- PC4600LA-Y** .. **pkg. of 16 yellow LED assemblies**
- PC4600LA-M** .. **pkg. of 10 red, 5 yellow, 1 green LED assemblies**
- PC4632GP** **point/graphic display package for PC4632 c/w :**
- two... 8.5" x 11" (21.6 x 27.9cm) film transparencies for graphics
 - one... 8.5" x 11" (21.6 x 27.9cm) silkscreened transparency for point annunciation
 - one... 8.5" x 11" (21.6 x 27.9cm) light diffuser sheet
 - one... 8.5" x 11" (21.6 x 27.9cm) Lexan front protective sheet
- PC4664GP** **point/graphic display package for PC4664 c/w :**
- two... 11" x 17" (27.9 x 43.2cm) film transparencies for graphics
 - one... 11" x 17" (27.9 x 43.2cm) silkscreened transparency for point annunciation
 - one... 11" x 17" (27.9 x 43.2cm) light diffuser sheet
 - one... 11" x 17" (27.9 x 43.2cm) Lexan front protective sheet
- PC4600LG** **pkg. of 4 LED grids to accept LED indicator assemblies**

Typical System Arrangement

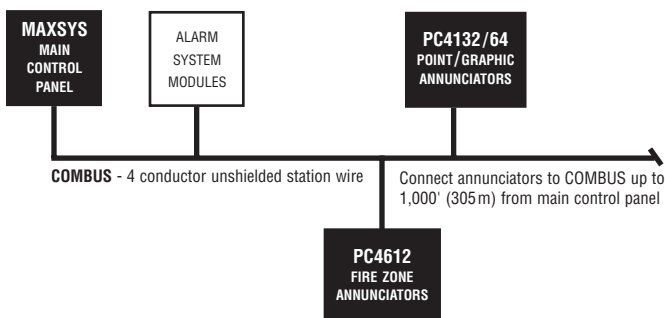

Listings

USA

- UL864 Control Units System (L, CS, -A, M, SS, WF)
- UL1610 Central Station Burglar Alarm
- UL609 Local Burglar Alarm
- UL365 Police Station Burglar Alarm
- UL985 Household Fire Warning
- UL1023 Household Burglar Alarm

CANADA

- ULC-S527 Central Station Fire Alarm
- ULC-S302 Central & Monitoring Station Burglar Alarm
- ULC-S303 Local Alarm (Commercial Burglary)
- ULC-S310 Household Burglar Alarm
- ULC-S545 Household Fire Warning
- UL294 Access Control

Distributed by :



©2002 Digital Security Controls Ltd.
Toronto, Canada
www.dsc.com
An ISO9001 registered company