

## 6-in-1 Multi-Purpose 12VDC Tester

**ST-BT02Q Tests:** Voltage • Load • Polarity • Voltage Drop • PTC Fuse • Continuity

### Features:

- ▶ Performs 6 essential tests in the field:
- NEW! Continuity Testing:** Check the continuity of a circuit, wire run, or dry contact.
- ✓ **Voltage Testing:** Check the voltage of power sources in the field without a multimeter.
- ✓ **Load Testing:** Apply a simulated 1A or 500mA load to power sources to check the voltage under load.
- ✓ **Polarity Testing:** Check polarity of wires using the illuminated power connector.
- ✓ **Voltage Drop Testing:** Check the amount of voltage drop over long cable runs.
- ✓ **PTC Fuse Testing:** Check the integrity of PTC fuses.
- ▶ Strength indication LEDs help test Load, Voltage, and PTC Fuses.
- ▶ Selectable load: 0.5A or 1A to test wiring depending on location, device to be tested, and anticipated voltage drop.
- ▶ Illuminated power connector: Clearly displays voltage polarity.
- ▶ Overheat indicator.

Now with  
**Continuity**




### Specifications:


Operating voltage	5 ~ 12 VDC	
Maximum load	0.5 / 1 A (switch selectable)	
Power	Continuity	3VDC CR1220 Battery (included)
	All other tests	Passive: No power required
Weight	1.4 oz (40g)	
Dimensions	2" X 1 3/4" X 1 1/8" (51 X 44 X 29 mm)	

### Performs 6 Essential Tests in the Field:


#### Continuity Testing



#### Voltage, Load, Polarity, and PTC Fuse Testing

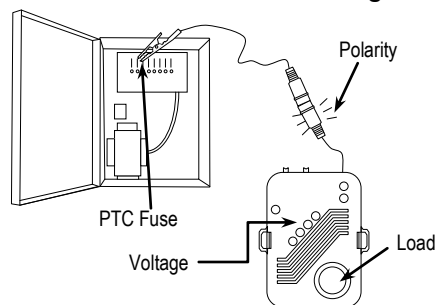

#### Voltage Drop Testing

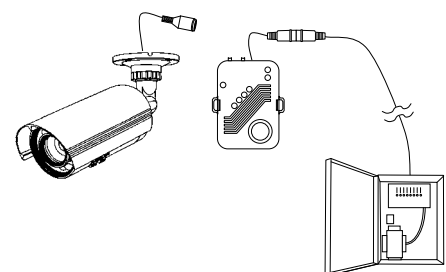

**SECO-LARM**  
16842 Millikan Avenue  
Irvine, CA 92606

Tel: 1-949-261-2999  
1-800-662-0800  
Fax: 1-949-261-7326

Web: [www.seco-larm.com](http://www.seco-larm.com)  
Email: [info@seco-larm.com](mailto:info@seco-larm.com)

CE RoHS  
Copyright © 2010  
SECO-LARM U.S.A., Inc.  
All rights reserved